




## K-FLEX 2200 H.F. H05Z1Z1-F IEC 60332.3.24

**Description :** Flame Retardant Harmonized Halogen Free multi-conductors connecting and control cable with colour code cores 300/500 V.

**Design:**

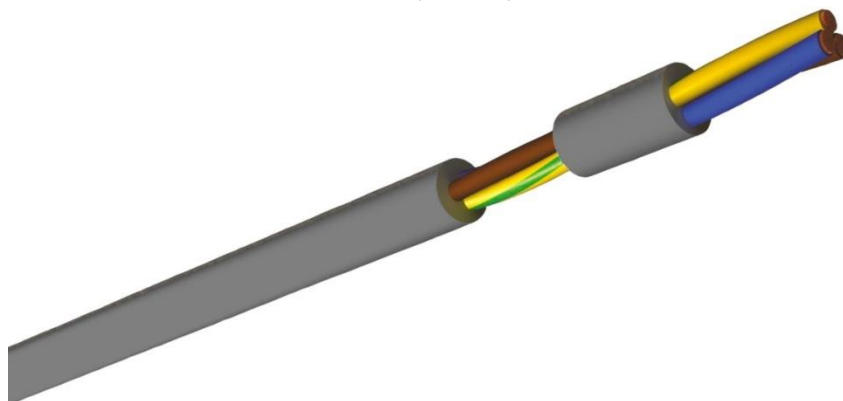

**Construction :** Flexible bare copper conductors according to CEI 20-29 Class 5 and DIN-VDE 0295 K5  
Special Halogen free insulation compound type **TI6** according to HD 21.14 S1 annex A  
Coloured coded cores according HD 308  
Special Halogen free jacket compound type **TM7** according to HD 21.14 S1 annex B

**Manufacturing's Controls:** Test and Control according to our certificated **ISO 9001-2008 CSQ-IMQ (EQ-NET)** Quality System procedure.  
Labor tests reports are stored in our internal Q.C. laboratory archive together with the production reports

**Norms :** Flame-retardant according to IEC 60332-1-2 (flame spread on a single cable)  
No flame-propagation according to IEC 60332-3-24 respectively IEC 60332-3-25 (Flame spread on vertical cable or wire bundle)  
Halogen-free according to IEC 60754-1 (amount of halogen acid gas) Corrosiveness of combustion gases according to IEC 60754-2 (degree of acidity)  
Low smoke density according to IEC 61034  
According to HD 21.14 S1  
The cable is conform to Low Voltage Directive (LVD) 2014/35/EU CE

**Technical dates :**

- Nominal voltage : 300/500V
- Spark Test voltage : 3000 V
- Working temperature : Occasional flexing: -15°C to +70°C  
Fixed installation: -40°C to +70°C
- Minimum bending radius Occasional flexing: 15 x outer Ø  
Fixed installation: 4 x outer Ø

**Use :** K-FLEX 2200 H.F. H05Z1Z1-F cables are used in applications as extension and connecting cables for electrical devices, appliances and machinery, where plugs must be permanently connected to the corresponding cable.  
Particularly suitable where human and animal life as well as valuable property are exposed to high risk of fire hazards.