




K-FLEX 5000 UL CSA

Description : American and Canadian oil-resistant Control and Power Cables manufactured in derogation to HD 21.13 S1 standard, according to UL AWM Style 2587 and CSA AWM I A/B II A/B.

Design:

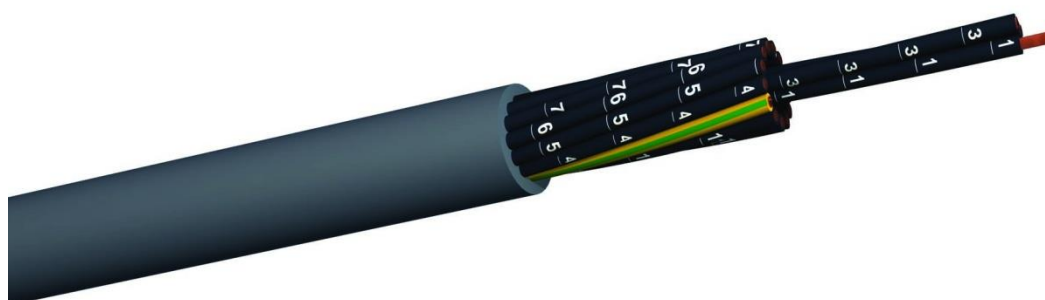

Construction :

- 1) Flexible bare copper conductors according to CEI 20-29 Class 5 and DIN-VDE 0295 K5
- 2) PVC Insulation compound type **TI1** according to CEI 20-11, VDE 0207 and UL 1581 - Black numbered cores + G.Y.
- 3) Outer jacket in special PVC **TM5** according to CEI 20-11 and VDE 0207 and UL 1581

Manufacturing's Controls: Test and Control according to our certificated **ISO 9001-2008 CSQ-IMQ (EQ-NET)** Quality System procedure.
Labor tests reports are stored in our internal Q.C. laboratory archive together with the production reports

Norms : Flam retardant, Test method B according to DIN VDE 0472 part 804, IEC 60332-1, IEC 60332-3C and CSA FT1
According to UL style 2587 and CSA-AWM I A/B II A/B
Manufactured in derogation to HD 21.13 S1 standard.
The cable is conform to Low Voltage Directive (LVD) 2014/35/EU CE

Technical dates :

- Nominal voltage : 600 V
- Spark Test voltage : 6000 V
- Working temperature : -40°C to +70°C
- Minimum bending radius : For permanent approx. 7,5 x Ø

Use : Efficient stocking! These control cables are especially suitable for export-orientated machinery, plant and equipment manufactures. These inexpensive cables make work easy, facilitate economic stocking and thus speeds up the export orders. It is suitable for control equipment on machine tools, conveyor and assembly lines, haulage systems, production lines etc. subjected to medium mechanical stresses, for fixed or flexible installation, where free movement is required without tensile stresses and without forced guidance systems, in dry, damp and wet interiors (including water-oil mixtures), but not outdoors.