




## K-FLEX 3000 UL CSA

**Description :** American and Canadian oil-resistant Control and Power Cables manufactured according to UL AWM Style 2587 and CSA AWM I A/B II A/B.

**Design:**

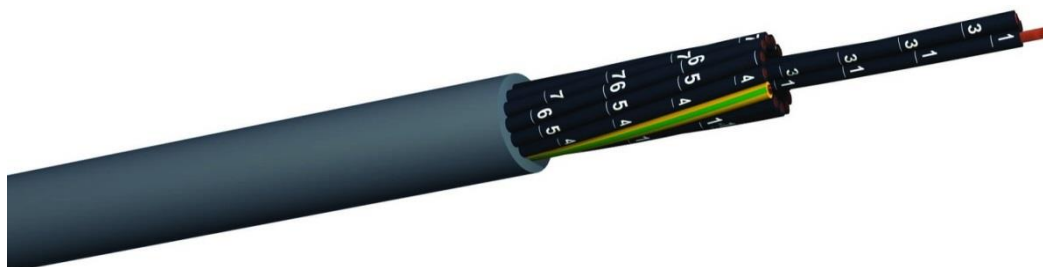

**Construction :** Flexible bare copper conductors according to CEI 20-29 Class 5, DIN-VDE 0295 K5 and IEC 60228 Cl.5  
 PVC Insulation compound TI3 and UL 90°C according to UL 1581  
 Black numbered cores with or without GY core  
 Talc  
 PVC outer sheath compound TM3 and UL 90°C according to UL 1581

**Manufacturing's Controls:** Test and Control according to our certificated **ISO 9001-2015 CSQ-IMQ** (EQ-NET) Quality System procedure.  
 Labor tests reports are stored in our internal Q.C. laboratory archive together with the production reports

**Norms :** Self-extinguish according to test method B IEC 60332-1  
 Reduced Fire Propagation, Fire retardant as IEC 60332-3-24 - CEI 20-22 II and NBN C30-004, cat. F2  
 Flame retardant rating UL VW1 and CSA FT1  
 According to UL styles 11008 - 2587 and CSA-AWM I A/B II A/B  
 The cable is conform to Low Voltage Directive (LVD) 2014/35/EU CE

**Technical dates :**

- Nominal voltage : 600 V
- Spark Test voltage : 6000 V
- Working temperature : Occasional flexing: -5 °C to +90 °C  
 Fixed installation: -40 °C to +90 °C
- Minimum bending radius : Occasional flexing: 15 x outer Ø  
 Fixed installation: 4 x outer Ø

**Use :** UL and CSA approved Control Cable especially for European and American markets. Suitable for fixed installation under medium mechanical load conditions as well as for flexing application at free, non-continuously recurring movement without tensile load or compulsory guidance. Mainly in dry, damp and wet interiors (including water-oil mixtures), but not for outdoor use.